

STANDARD LINEAR GUIDES

LH15 INTERCHANGEABLE SERIES










LH15 combines the interchangeability of LH series with a compact size. Sliders equipped with NSK K1 maintenance-free lubrication system.

Prompt delivery. More rigidity and load rating because of its two-lines groove. Dimensionally equivalent with others manufacturers.


TECHNICAL CHARACTERISTICS

Model No	Grease fitting Hole size	H (recommended) (mm)	Rail Lomax (mm)	Basic load rating					Ball dia Dw (mm)	Weight	
				Dynamic C	Static Co	Static moment				Ball Slide (kg/m)	Rail (kg/m)
						MRO	MPO	MYO			
				(N)	(N/m)						
LAH15ANZ-K				8300	16200	98	78	78		0,18	
LAH15BNZ-K				11200	25000	147	177	177		0,26	
LAH15ELZ-K	Ø 3	20	2000	8300	16200	98	78	78	3,175	0,17	1,6
LAH15GLZ-K				11200	25000	147	177	177		0,25	
LAH15FLZ-K				8300	16200	98	78	78		0,17	
LAH15HLZ-K				11200	25000	147	177	177		0,25	

INTERCHANGEABLE SLIDERS

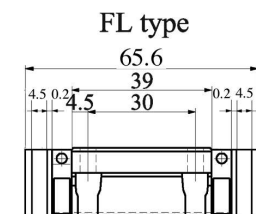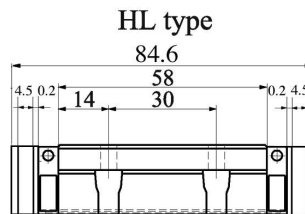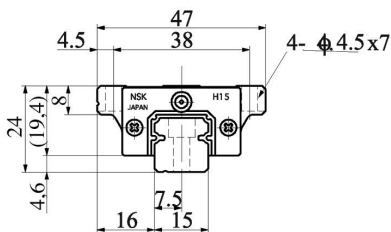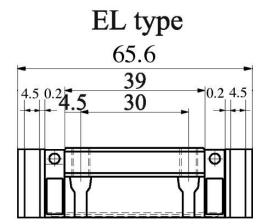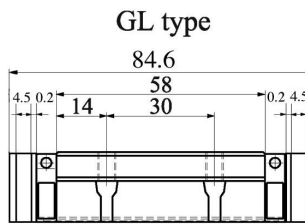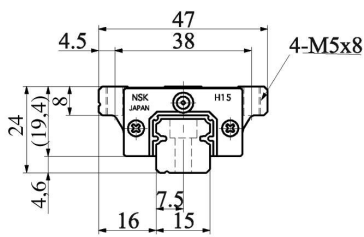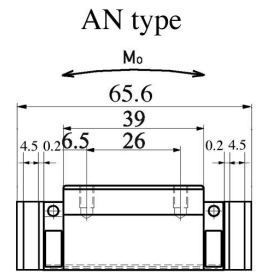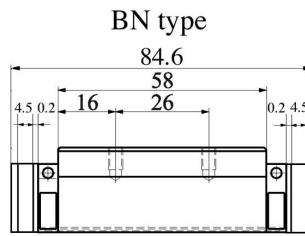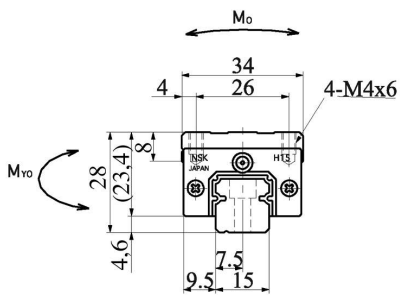

RAIL

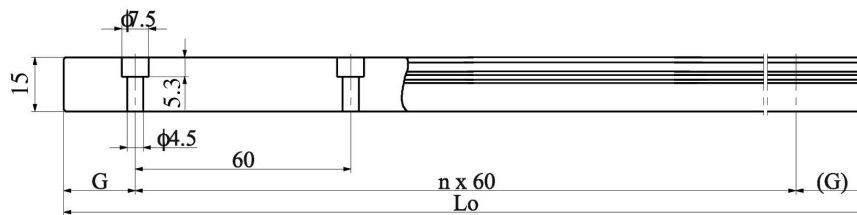

MOTION & CONTROL

NSK

NSK DEUTSCHLAND GMBH
Harkortstraße, 15
40880 Ratingen
GERMANY
Phone 02102-481-2880
Fax 02102-481-2680
precision-de@nsk.com

NSK EUROPE, LTD
Northern Road - Newark
Notts HG24 2JF
U.K.
Phone 01636-602-850
Fax 01636-602-754
precision-uk@nsk.com

NSK FRANCE, S.A.
Quartier de l'Europe
2, rue Georges Guynemer
78280 Guyancourt
FRANCE
Phone 01-30 57 75 34
Fax 01-30 57 75 70
precision-fr@nsk.com

NSK ITALIA, S.P.A.
Via Garibaldi, 215
20024 Garbagnate Milanese
Milano
ITALY
Phone 02-99519 227
Fax 02-99028 373
precision-it@nsk.com

NSK SPAIN, S.A.
C/ de La Hidráulica. 5
Pol. Ind. La Ferrería.
08110 Montcada i Reixac
(Barcelona). SPAIN
Phone 93 575 16 62
Fax 93 575 05 20
precision-es@nsk.com